

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 0 899 801 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**24.04.2002 Bulletin 2002/17**

(51) Int Cl.7: **H01M 2/18**

(21) Application number: **98202550.4**

(22) Date of filing: **30.07.1998**

(54) **Battery separator having a puncture-proof border**

Batterieseparator mit perforationsbeständigem Rand

Séparateur de batterie à bords résistants à la perforation

(84) Designated Contracting States:  
**DE FR GB**

(30) Priority: **26.08.1997 US 918812**

(43) Date of publication of application:  
**03.03.1999 Bulletin 1999/09**

(73) Proprietor: **Delphi Technologies, Inc.**  
**Troy, MI 48007 (US)**

(72) Inventors:  
• **Hercamp, Dennis Wayne**  
**Pendleton, Indiana 46064 (US)**  
• **Key, Tony Edward**  
**Yorktown, Indiana 47396 (US)**

(74) Representative: **Denton, Michael John et al**  
**Delphi Automotive Systems,**  
**Centre Technique Paris,**  
**117 avenue des Nations,**  
**B.P. 60059**  
**95972 Roissy Charles de Gaulle Cédex (FR)**

(56) References cited:  
**EP-A- 0 062 525 EP-A- 0 484 295**  
**US-A- 5 558 952**

- **PATENT ABSTRACTS OF JAPAN vol. 014, no. 421 (E-0976), 11 September 1990 & JP 02 160365 A (MATSUSHITA ELECTRIC IND CO LTD), 20 June 1990**
- **PATENT ABSTRACTS OF JAPAN vol. 006, no. 067 (E-104), 28 April 1982 & JP 57 009058 A (MATSUSHITA ELECTRIC IND CO LTD), 18 January 1982**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

1

EP 0 899 801 B1

2

**Description****TECHNICAL FIELD**

**[0001]** This invention relates to interelectrode separators for electric storage batteries, and more particularly to battery separators having rib-reinforced borders to prevent puncture thereof by the battery electrode's grid-wires.

**BACKGROUND OF THE INVENTION**

**[0002]** Electric storage batteries typically comprise an electrochemically active cell element comprising a plurality of interleaved positive and negative polarity electrode plates separated one from the other by thin, ribbed, microporous polymer (e.g., polyethylene, PVC, etc.) sheets interjacent adjacent plates. The separators serve to separate and electrically isolate one (e.g., positive electrode) from the other (e.g., negative counterelectrode), have sufficiently small pores therein to suppress interplate dendrite growth, and sufficiently high porosity as to permit electrolyte and ionic mobility within the cell. A commercially popular such separator comprises microporous polyethylene which is marketed under the tradenames DARAMIC® by the W. R. Grace Co. or RHINOHIDE® by the Emark Co. Typically, such separators will vary in thickness from about 0.006 in. to about 0.015 in. in the backweb section of the separator that lies between spacer ribs on the face of the separator. Some manufacturers envelop the plates of one or both polarities in individual sheaths or envelopes formed from sheets of the separator material. Enveloping the plates in separator sheaths reduces the possibility of interplate shorting occurring at the edges of adjacent positive and negative plates. A typical such sheath is formed by folding an elongated strip of separator material in half, transverse its length, and inserting the plate into the fold (see Figure 1). Thereafter, the lateral edges of the sheath outboard the edges of the inserted plate are bonded together as by heat sealing, electrosonic welding, pressure welding or the like.

**[0003]** The electrode plates themselves typically comprise a conductive metal grid (e.g., lead) embedded in a mass of electrochemically active material (e.g., Pb or PbO<sub>2</sub>). One such grid comprises an expanded metal grid such as disclosed in U.S. Patent No. 3,853,626 issued December 10, 1974 and assigned to the assignee of the present invention. When pasted with active material and cut into plates, such expanded metal grids frequently have sharp gridwire ends along the lateral edges of the plate which can puncture the borders of the separator envelope which, in turn, can cause internal shorting within the battery and a significant reduction in its useful life. US-A-5 558 952 discloses a separator in accordance with the preamble of claim 1.

**SUMMARY OF THE INVENTION**

**[0004]** The present invention is directed to a microporous polymer battery separator, and plate envelope/sheath made therefrom, designed and configured to reduce the likelihood of the gridwire end puncturing the separator along the lateral borders thereof. More specifically, the present invention contemplates a microporous polymer separator, and sheathed electrode plate made therefrom, wherein the separator has a pair of borders along the lateral edges thereof which comprise a plurality of closely spaced ribs each separated from the next by a concave furrow forming an elongated fillet at the bases of adjacent ribs. The rib frequency/density is such as to provide at least 29 ribs per lineal inch, and preferably about 34 ribs per lineal inch. In a preferred embodiment, the exterior surface of the border is corrugated. Most preferably, the surface of the border is characterized by a plurality of straight, parallel, regularly spaced and equally curved ribs and concave furrows intermediate the ribs. The closely spaced ribs and concave furrows therebetween provide significant resistance to gridwire puncture.

**BRIEF DESCRIPTION OF THE DRAWINGS**

**[0005]** The invention will be better understood when considered in the light of the following detailed description of a preferred embodiment thereof which is given hereafter in conjunction with the several figures in which:

Figure 1 is a partially broken away isometric view of a battery separator in accordance with the present invention prior to encapsulating a plate; Figure 2 is a partially broken away isometric view of a battery plate enveloped/sheathed in a battery separator in accordance with the present invention; Figure 3 is an isometric view of a cell element formed from alternating sheathed and unsheathed plates; Figure 4 is a view in the direction 4-4 of Figure 2; and Figure 5 illustrates the border of a prior art separator used commercially by the assignee of the present invention.

**DESCRIPTION OF A PREFERRED EMBODIMENT**

**[0006]** Figure 1 illustrates a typical technique for assembling a battery plate 2 in an envelope/sheath 4 of battery separator material 6. The electrode plate 2 comprises an expanded metal grid 8 having a plurality gridwires 10 extending across the face thereof and joined to an electrically conductive border 12 at the top. Optionally, an electrically conductive border 14 may be provided at the bottom of the grid. A lug 16 projects from the top border 12 for coupling to other electrodes of like polarity in a battery element. The grid 8 is covered (e.

g., pasted) with an electrochemically active material 18, as is well known in the art. The plate 2 is inserted into the fold 20 of a sheet of separator material 6 which is folded back upon itself along the fold edge 22. The separator 6 includes a plurality of primary ribs 24 which extend across the faces of the separator 6 which overlie the plate 2, and serve to space the enveloped plate 2 from the next adjacent plates in the battery cell element (see Figure 3). The folded separator 6 includes lateral borders 26A and 26B which overlie, and sandwich therebetween, the lateral edges 28A and 28B of the plate 2, and are bonded to each other outboard the edges 28A and 28B to form the envelope. Such bonding may be effected by heat sealing, ultrasonic welding, pressure welding, etc., as is well known in the art.

[0007] Figure 2 depicts the electrode plate 2 after it has been inserted in, and enveloped by, the microporous separator 6 and pressure bonded to itself at the sites 30 in the borders 26A and 26B. If at the time the plate 2 is cut, the cutters do not cut the plate 2 precisely through nodes 32, but rather through gridwires 10, as shown, the ends 34 of the gridwires 10 can bend up and outwardly of the plane of the plate 2, and possibly puncture the border 26A or 26B of the separator sheath 6, which, in turn, can cause electrical shorting of the adjacent plates. This is a particular problem with prior art separators (see Figure 5) which have widely spaced (i.e., about 18 ribs per lineal inch) border ribs, and stress concentration sites 48 at the bases of the ribs. Such prior art separators failed primarily at the stress concentration sites.

[0008] Figure 3 depicts a typical battery cell element comprising a plurality of separator enveloped plates 36 of one polarity alternately interleaved with a plurality of unenveloped plates 38 of the opposite polarity. In some batteries, it may be desirable to envelop the plates of both polarity. Preferably however in the case of lead acid storage batteries, only the negative polarity plates are enveloped in the separator material.

[0009] Figure 4 depicts the electrode plate 2 enveloped in the separator material 6 which has primary plate-spacing ribs 24 having a height X above the face 40, and a border 26B bonded to itself at the edge 42 thereof outboard the edge 28B of the plate 2. The border 26B comprises a plurality of closely spaced secondary, puncture-proofing ribs 44, each separated from the next by elongated concave furrows 46 which provide fillets at the bases of the ribs bordering the furrows and a smooth transition from one rib 44 to the next. Such fillets eliminate any stress concentration sites like those found in prior art separators (see Figure 5) which are the most common puncture sites for separators now in commercial use by Applicants' assignee. The puncture-proofing ribs 44 have a height Y above the face 40 of the separator, where Y is less than the height X of the plate-spacing ribs 24. By increasing the frequency (i.e., ribs per lineal inch) of the secondary ribs 44, and providing a filleted transition therebetween in the concave furrows

46, the failure rate due to such punctures has been reduced by as much as 24 percent compared to commercial separators as shown in Figure 5.

[0010] Preferably, the exterior surface of the borders 26A and 26B will be corrugated (see Figure 4) so as to provide a plurality of concave furrows 46 intermediate a plurality of straight, parallel, regularly spaced, and equally curved puncture-proofing ribs 44. Preferably, the border will comprise at least about 29 ribs per lineal inch (i.e., transverse the length of the ribs), and most preferably about 34 ribs per lineal inch. The ribs 44 and furrows 46 will preferably have a radius of about .008 inch to about .012 inch, and most preferably about 0.010 inch.

[0011] While the invention has been disclosed primarily in terms of specific embodiments thereof it is not intended to be limited thereto but rather only to the extent set forth hereafter in the claims which follow.

## Claims

1. A battery separator (6) having a microporous polymer sheet having a face adapted to confront an electrode plate (2) of said battery, a border (26A, 26B) along opposing edges (42) of said sheet defining said face, said border having a corrugated surface **characterized in that** the border (26A, 26B) has a plurality of straight, parallel, regularly spaced, and concave furrows (46) intermediate a plurality of straight, parallel, regularly spaced, equally curved ribs (44).
2. The separator according to claim 1 wherein said border (26A, 26B) has edges (42) and is bonded to itself at said edges.
3. An electric storage battery comprising a plurality of electrode plates (2) each sheathed in an envelope (4) of a microporous polymer sheet of separator material (6) folded about said plate, said plates each comprising an electrochemically active material supported on an expanded metal grid (8) having a plurality of gridwire ends (34) along at least one edge (28A, 28B) of said plate, and said envelope having at least one border (26A, 26B) sandwiching said one edge, **characterized in that** the separator is that of claims 1 or 2 wherein the border has a corrugated exterior surface adapted to reduce the likelihood of said ends puncturing said border.

## Patentansprüche

1. Batterieseparator (6) mit einer mikroporösen Polymerbahn, die eine Fläche aufweist, die derart angepaßt ist, dass sie einer Elektrodenplatte (2) der Batterie zugewandt ist, und einen Rand (26A, 26B)

5

EP 0 899 801 B1

6

entlang entgegengesetzter, die Fläche definieren der Kanten (42) der Bahn aufweist, wobei der Rand eine gewellte Oberfläche aufweist, **dadurch gekennzeichnet, dass** der Rand (26A, 26B) eine Vielzahl von geraden, parallelen, regelmäßig beabstandet angeordneten und konkaven Furchen (46) zwischen einer Vielzahl von geraden, parallelen, regelmäßig beabstandet angeordneten, gleich gekrümmten Rippen (44) aufweist.

5

10

2. Separator nach Anspruch 1, wobei der Rand (26A, 26B) Kanten (42) aufweist, und mit sich selbst an den Kanten verbunden ist.

3. Elektrische Speicherbatterie, umfassend eine Vielzahl von Elektrodenplatten (2), die jeweils in einem Umschlag (4) aus einer mikroporösen Polymerbahn aus Separatormaterial (6), die um die Platte herum gefaltet ist, eingeschlagen sind, wobei die Platten jeweils ein elektrochemisch aktives Material umfassen, das auf einem expandierten Metallgitter (8) gehalten ist, das eine Vielzahl von Gitterdrahtenden (34) entlang mindestens einer Kante (28A, 28B) der Platte aufweist, und der Umschlag mindestens einen Rand (26A, 26B) aufweist, zwischen dem die eine Kante angeordnet ist, **dadurch gekennzeichnet, dass** der Separator derjenige der Ansprüche 1 oder 2 ist, wobei der Rand eine gewellte Außenfläche aufweist, die derart angepaßt ist, dass sie die Wahrscheinlichkeit verringert, dass die Enden den Rand durchstoßen.

15

20

25

30

## Revendications

35

1. Séparateur de batterie (6) comportant une feuille polymère microporeuse comprenant une face conçue pour faire face à une plaque d'électrode (2) de ladite batterie, une bordure (26A, 26B) le long des bords opposés (42) de ladite feuille définissant ladite face, ladite bordure comportant une surface ondulée **caractérisé en ce que** la bordure (26A, 26B) comporte une pluralité de sillons (46) droits, parallèles, espacés régulièrement et concaves entre une pluralité de nervures (44) droites, parallèles, régulièrement espacées, incurvées de manière égale.
2. Séparateur selon la revendication 1 dans lequel ladite bordure (26A, 26B) comporte des bords (42) et est soudée à elle-même au niveau desdits bords.
3. Batterie d'accumulateurs électriques comprenant une pluralité de plaques d'électrode (2) chacune revêtue d'une enveloppe (4) d'une feuille polymère microporeuse du matériau de séparateur (6) pliée autour de ladite plaque, lesdites plaques comprenant chacune un matériau actif du point de vue électrochimique supporté sur un grillage métallique

40

45

50

55

étendu (8) comportant une pluralité d'extrémités de câble de grille (34) le long d'au moins un bord (28A, 28B) de ladite plaque, et ladite enveloppe comportant au moins une bordure (26A, 26B) prenant en sandwich ledit un bord, **caractérisé en ce que** le séparateur est celui selon la revendication 1 ou 2 dans lequel la bordure présente une surface extérieure ondulée conçue pour réduire la probabilité que lesdites extrémités perforent ladite bordure.

EP 0 899 801 B1


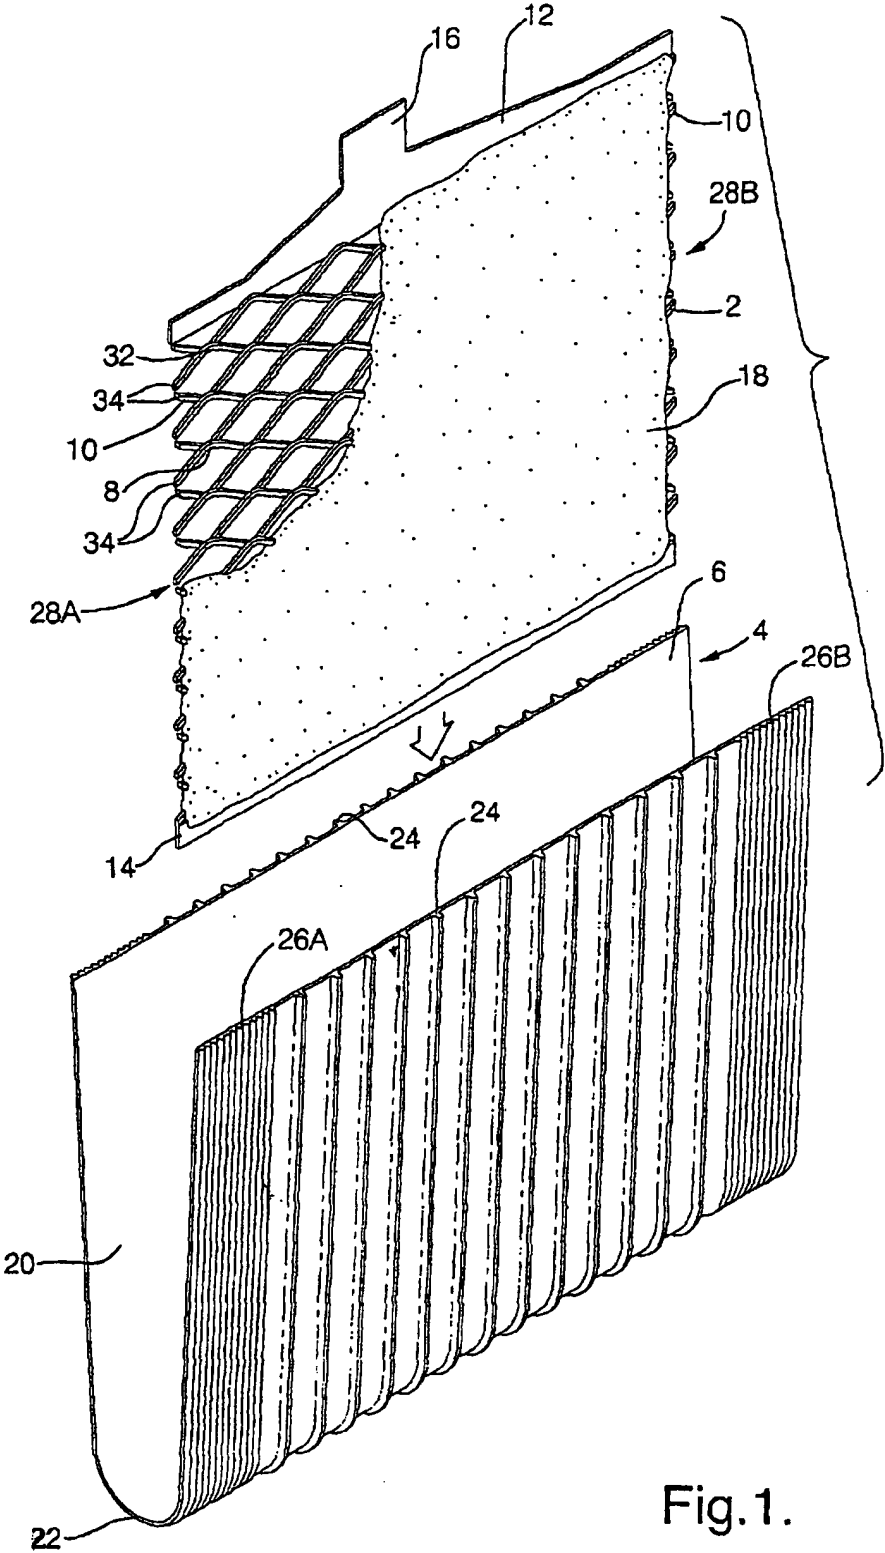


Fig. 1.

**EP 0 899 801 B1**

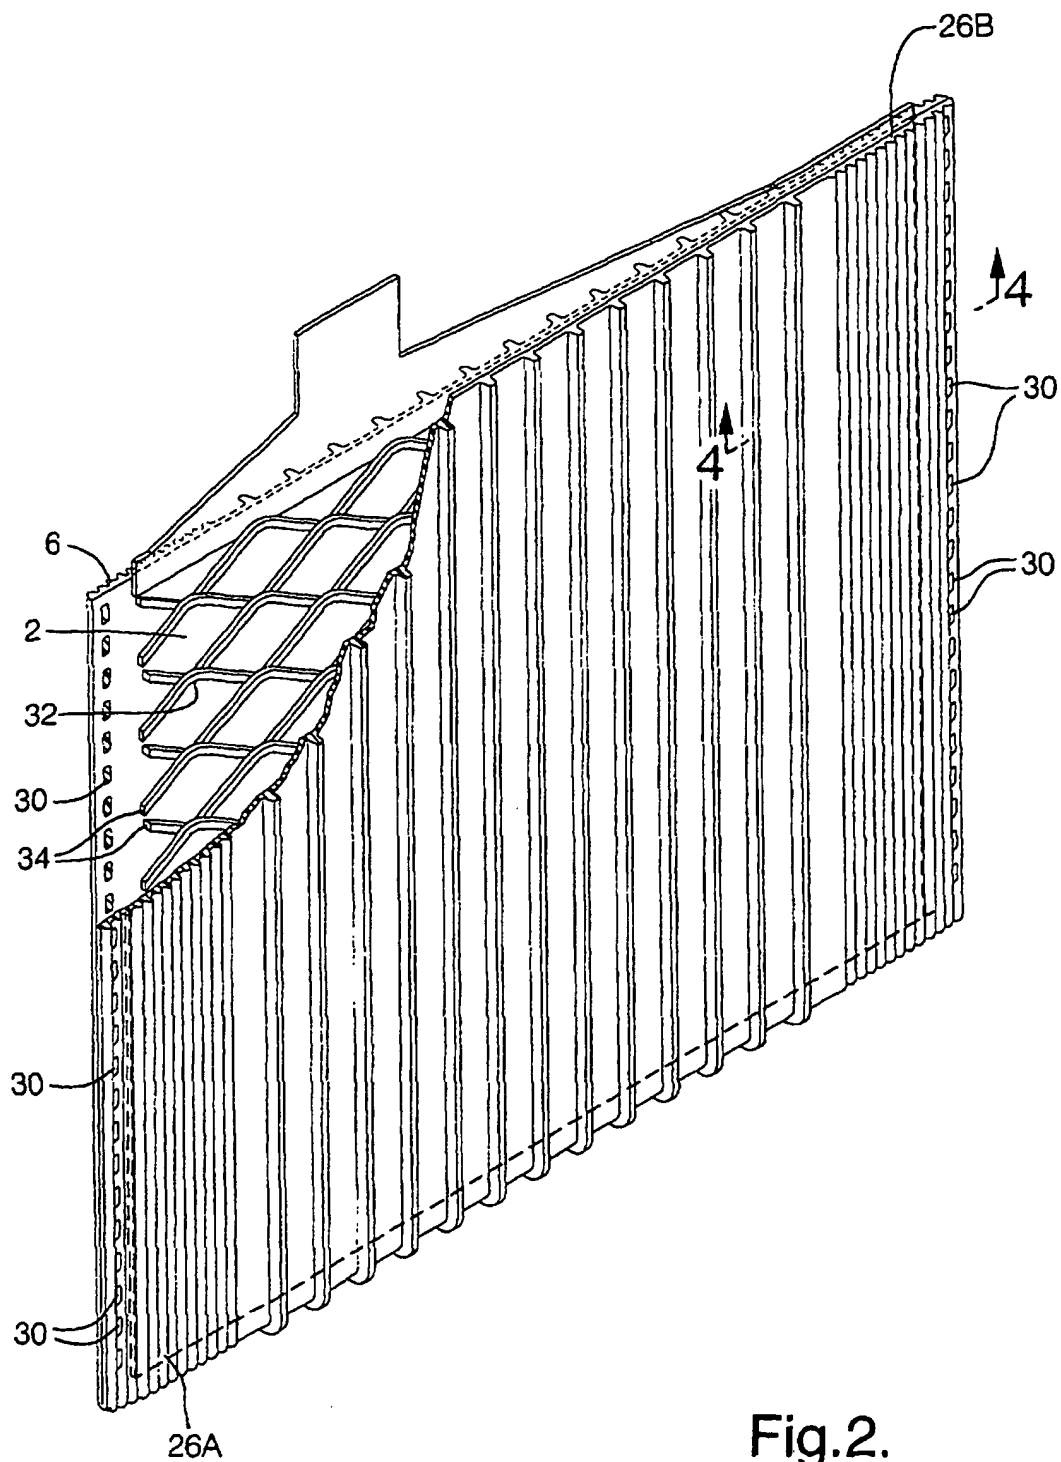

EP 0 899 801 B1

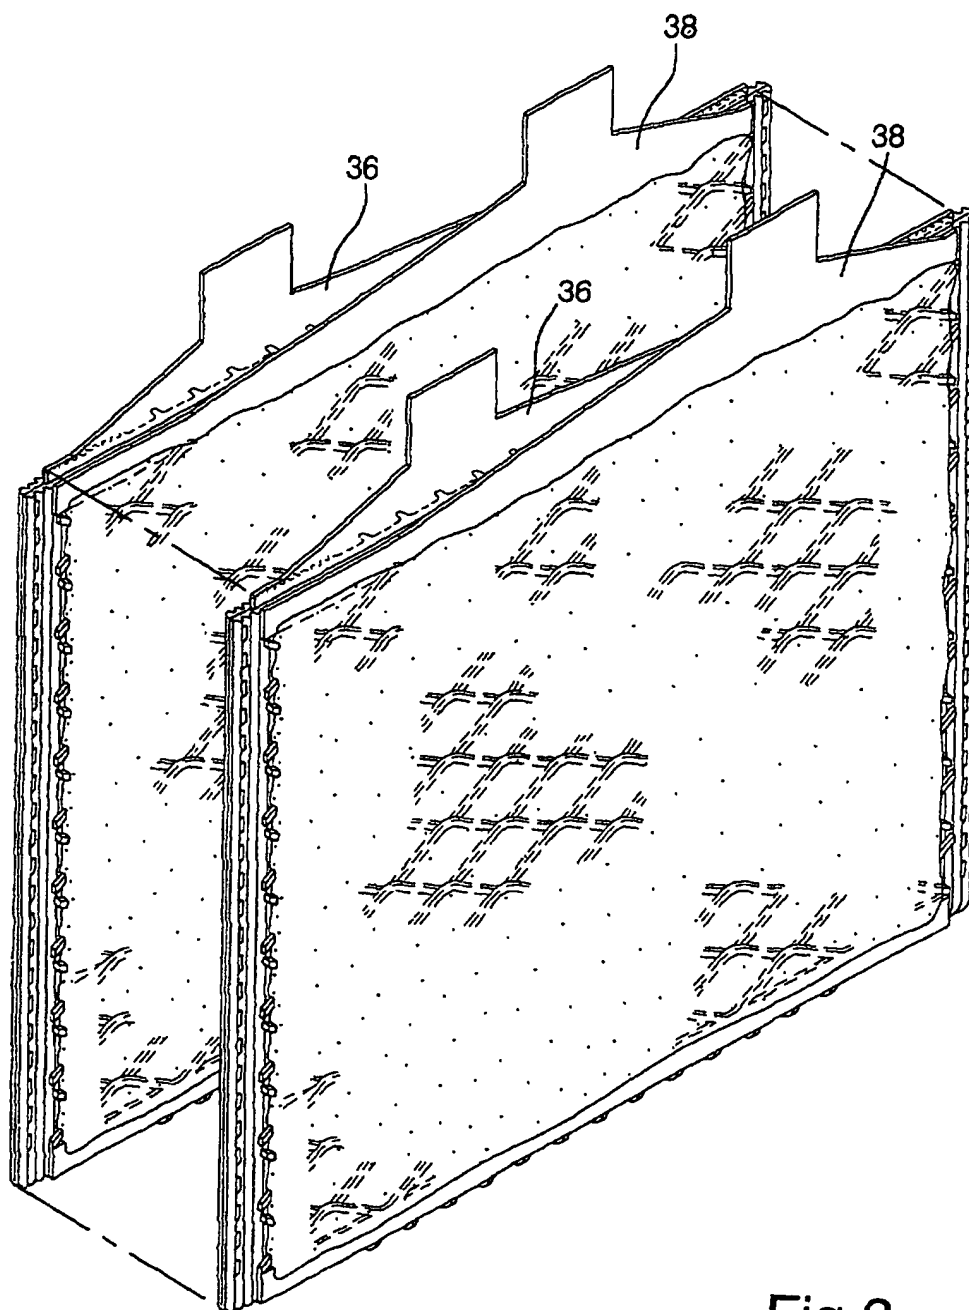


Fig.3.

EP 0 899 801 B1

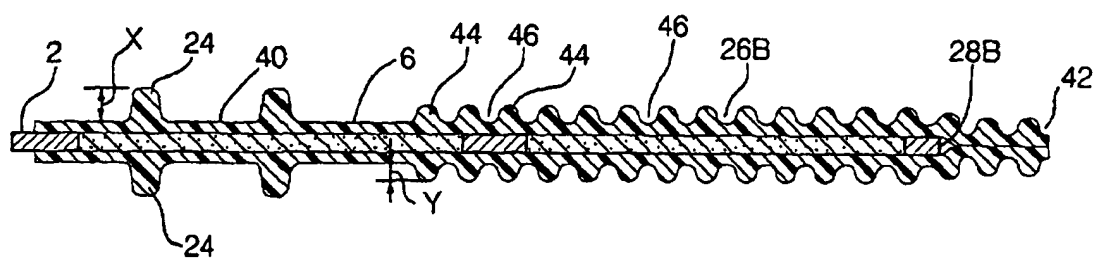


FIG. 4.

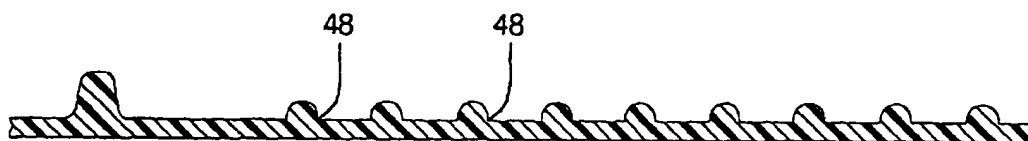


FIG. 5.